

MODEL 70 SCRAPER

HOW TO ORDER PARTS:

Be sure to state MODEL and SERIAL NO. of machine, PARTS NO., DESCRIPTION, and QUANTITY wanted.

Unless this is done, we cannot provide prompt service or assure shipment of the correct parts.

INDEX

PAGE NO.

- | | |
|------|---------------------------------------|
| 1. | Illustration - Assembly |
| 2-3. | Assembly Instructions |
| 4. | Operator and Maintenance Instructions |
| 5. | Frame Assembly |
| 6. | Pole and Axle Assembly |
| 7. | Actuating Assembly |
| 8. | Bucket and Apron Assembly |
| 9. | Wheel, Hub and Spindle Assembly |
| 10. | Hydraulic Cylinder (5" x 16") |
| 11. | How to Operate the W7B-20DC Rim |

ASSEMBLY INSTRUCTIONS FOR MODEL 70 SCRAPER

(Refer to illustration on previous page)

1. A suitable hoist or lift should be available for assembly.
2. Pack wheel bearings with grease and install hubs to rear spindles and to front axle assembly on model 70D scrapers.
3. Install rear spindles to frame in lowest possible setting to obtain the maximum spreading depth between cutting edge and ground. If less depth of spread is desired, select a lower setting or reverse the spindle bottom-to-top.

(Steps 4 and 5 refer to model 70D scrapers only)

4. Raise the front of the frame and remove the two 5/8" x 4" bolts which hold the cast socket halves inside the gooseneck post. Remove the socket halves.
5. Roll the pole and axle assembly directly under the gooseneck and place the cast socket halves around the ball swivel on the axle. Lower the frame into place so that the socket halves seat into the gooseneck. (If necessary, clamp halves together with C-clamp while lowering gooseneck.) Replace the two 5/8" x 4" bolts and tighten securely. Install a long shank grease fitting into hole provided.
6. Raise the actuating frame over bucket and lower into place so that the holes in the arms of the actuating frame align with the rear hole on each side of the bucket. (Point A). Insert 1 1/2" x 2 3/4" pins (with tab type head) from the inside of the bucket. Secure with 5/8" x 1 1/2" NF bolt through bucket side with nut and lockwasher to the outside.
7. Connect a short chain from the cutting edge to the cross pipe of the actuating frame, then raise the bucket and actuating frame assembly over the main frame and lower into place so that the front of the actuating frame can be connected to the 1 3/4" bushing on each side of the frame. (Point B) Secure with 5/8" x 1-1/4" NC capscrews and lockwashers.
8. Install the actuating arm bars to the front holes in the bucket. (Point C) Insert 1 1/2" x 2 3/4" pins (with tab head) from the inside of the bucket. Secure with 5/8" x 1 1/2" NF bolt through bucket side with lock nut on the outside.
9. Lift the end of the front actuating arms and connect to the brackets on the front frame cross-member using 1 1/2" x 4 1/2" pins. (Point D) Do not insert the pins completely.
10. Install the apron actuating links (linkage with built-in spring) to the bracket on each apron arm (Point E), using the 1-5/8" to 1-1/4" shoulder pins (with grease hole in threaded end). Secure with 1-1/4" NF lock nut (thin). Be certain the open end of the tube containing spring is downward.
11. Raise the apron over the scraper and lower into place so the hole in the end of the arms aligns with the hole in each side of the bucket walls (Point F). Attach with 1-5/8" to 1-1/4" shoulder pins (with grease hole in hex head). Secure with 1-1/4" NF thick nut.

12. Connect the opposite end of the apron actuating links, referred to in step 10, to the bracket on the front frame cross-member, referred to in step 9, adjacent to the actuating arms connected from the bucket (Point D). Insert the pins the remainder of the way and secure tab to bracket with ½” NC x 1-1/4” capscrew and lockwasher.
13. Install hydraulic cylinders to main frame and actuating frame with rod end to actuating frame. Be sure the grease hole in the rod end is facing up. Use 1-1/8” x 3 ¼ ” pin at the base of the cylinder. Secure with 3/16” x 1 ½” cotter pins. Use 1-1/4” x 6” pin at the rod end of the cylinder. Secure with ½” x 1” NC capscrew and lockwasher.
14. Install ½” x 90° swivel adapters into front and rear ports on each cylinder. Tighten so that the hose fitting faces toward the rear.
15. Connect a ½” x 18” hose from the rear port of each cylinder to one of the pipe lines in the rear cross frame. Be sure both hoses from the rear ports are connected to the same pipe line.
16. Connect a ½” x 38” hose from the front port of each cylinder to the remaining pipe line on the rear cross-member of the frame.
17. Install all the grease fittings and grease liberally.
18. If possible, place assembled scraper on level floor or pavement and measure the distance from the cutting edge to floor, on both left and right sides, and then adjust rear spindles to obtain equal distance on both sides.

ASHLAND INDUSTRIES, INC.

OPERATOR AND MAINTENANCE INSTRUCTIONS


The scraper is a durable piece of equipment and with proper care will yield many years of trouble free operation. The scraper requires a power source with one 4-way (double acting) hydraulic control valve.

After scraper has been assembled, it should be greased at all points where grease fittings are provided. Connect hydraulic hoses to tractor and operate the scraper to maximum raise and drop several times to force any air from the hydraulic lines and cylinders. Check the oil level in the tractor hydraulic system and add to maintain the proper level.

When the scraper is placed into operation, the operator will have to "feel out" the amount of depth of cut to obtain maximum loading efficiency. This is usually accomplished by taking a lesser and more uniform cut. However, some soil conditions such as loose sand may require a "pumping action" obtained by taking successive deep cuts and lifting out of cut as the tractor begins to lose power or traction.

1. After 10 hours work, all bolts should be checked and tightened if necessary.
2. Every 10 hours all grease fittings should be lubricated.
3. After 50 hours work, all bolts should be rechecked and tightened if necessary. Check wheel bearings and adjust if necessary.
4. After 300 hours work, clean and repack wheel bearings and replace, if necessary, cutting edges, worn pins, etc.


ASHLAND INDUSTRIES, INC.

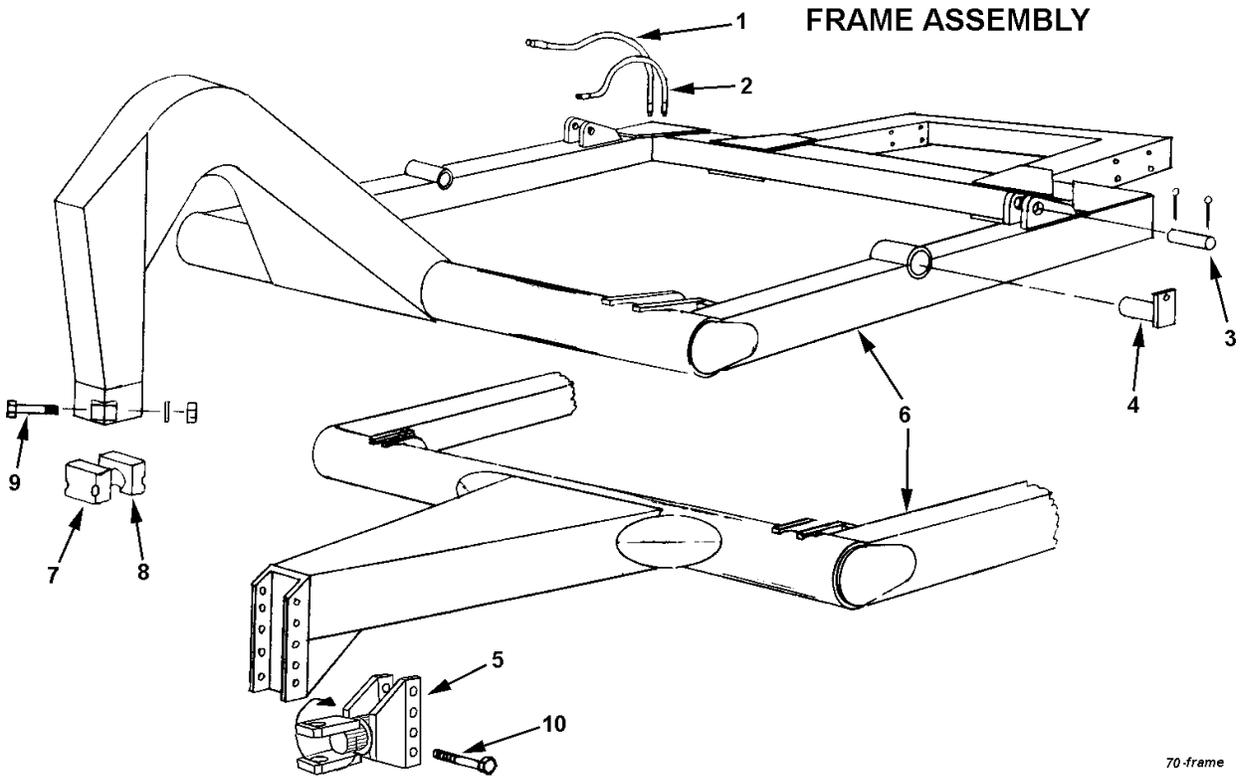

<u>KEY NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	A400H01	Hydraulic hose, 1/2" 38"
2	A60H01A	Hydraulic hose, 1/2" x 18"
	A400H02	Swivel adapter, 1/2" x 90°
3	A45003	Pin, 1-1/8" x 3-1/4" w/ 3/16" x 1-1/2" cotter
4	A40016A	Pin, 1-3/4" x 6-1/8" w/ lock type head
5	A8033	Swivel hitch
6	A6002C	Frame - 4 wheel
	A6003C	Frame - 2 wheel
7	A40005	Cast socket half, front, w/ zerk hole
	A2206	Zerk, w/ long straight shank
8	A40004	Cast socket half, rear
9		Bolt, 5/8" NC x 4" w/ nut & lockwasher
10		Bolt, 1-1/4" NF x 7" w/ lock nut


POLE AND AXLE ASSEMBLY

(4 Wheel models only)

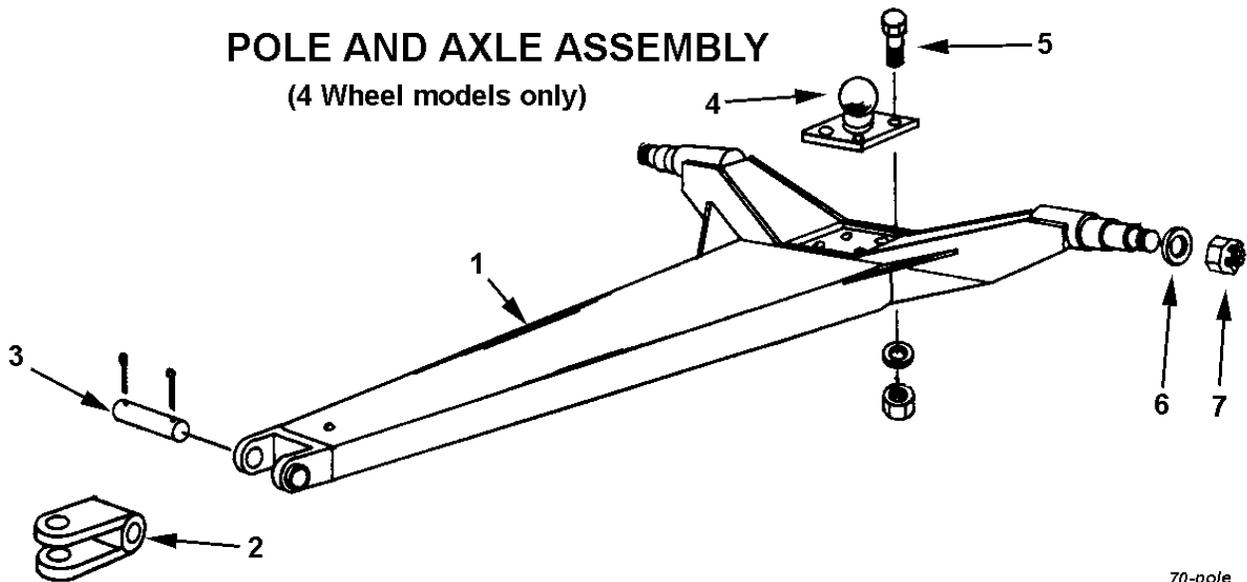

70-pole

<u>KEY NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	A40007D	Pole & Axle
2	A6013	Swivel hitch, double lip
	A6013A	Swivel hitch, single lip
3	A6014	Pin, 1-1/4" x 6-3/4", w/ 5/16" NC x 2-1/2" bolt
4	A40006	Ball swivel
5		Bolt, 3/4" x 2-1/2" w/ nut & lockwasher
6	A2239	Washer, special 7/8" flat
7		Nut, 7/8" castellated

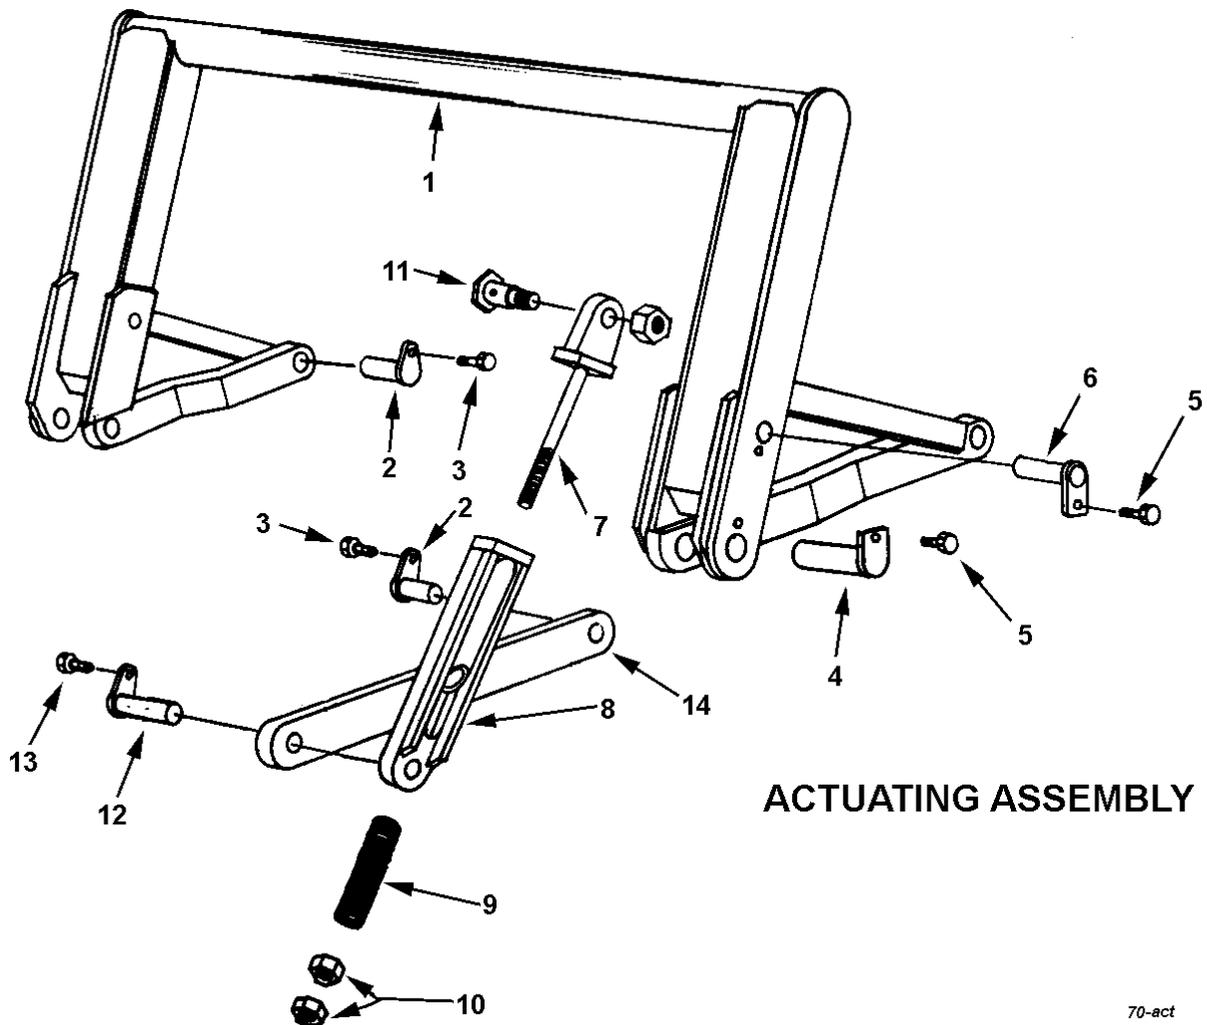


ACTUATING ASSEMBLY

70-act

<u>KEY NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	A7004	Actuating frame
2	A8005	Pin, 1-1/2" x 2-3/4" w/ tab head
3		Bolt, 5/8" x 1-1/2" NF w/ nut & lockwasher
4	A40016A	Pin, 1-3/4" x 6-5/8" w/ tab head
5		Capscrew, 5/8" x 1-1/4" NC w/ lockwasher
6	A7010	Pin, 1-1/4" x 6" w/ tab head
7	A6015	Actuating link (upper half)
8	A6016	Actuating link (lower half)
9	A6018	Compression Spring, 1" ID x 2" OD x 10" long
10		Nut, 1" NF
11	A6019	Shoulder pin, 1-5/8" x 1-1/4" w/ zerk in thread end Nut, 1-1/4" NF, lock type
12	A6020	Pin, 1-1/2" x 4-1/2" w/ locking head w/ zerk
13		Capscrew, 1/2" NC x 1-1/4" w/ lockwasher
14	A7006	Actuating arm


BUCKET & APRON ASSEMBLY

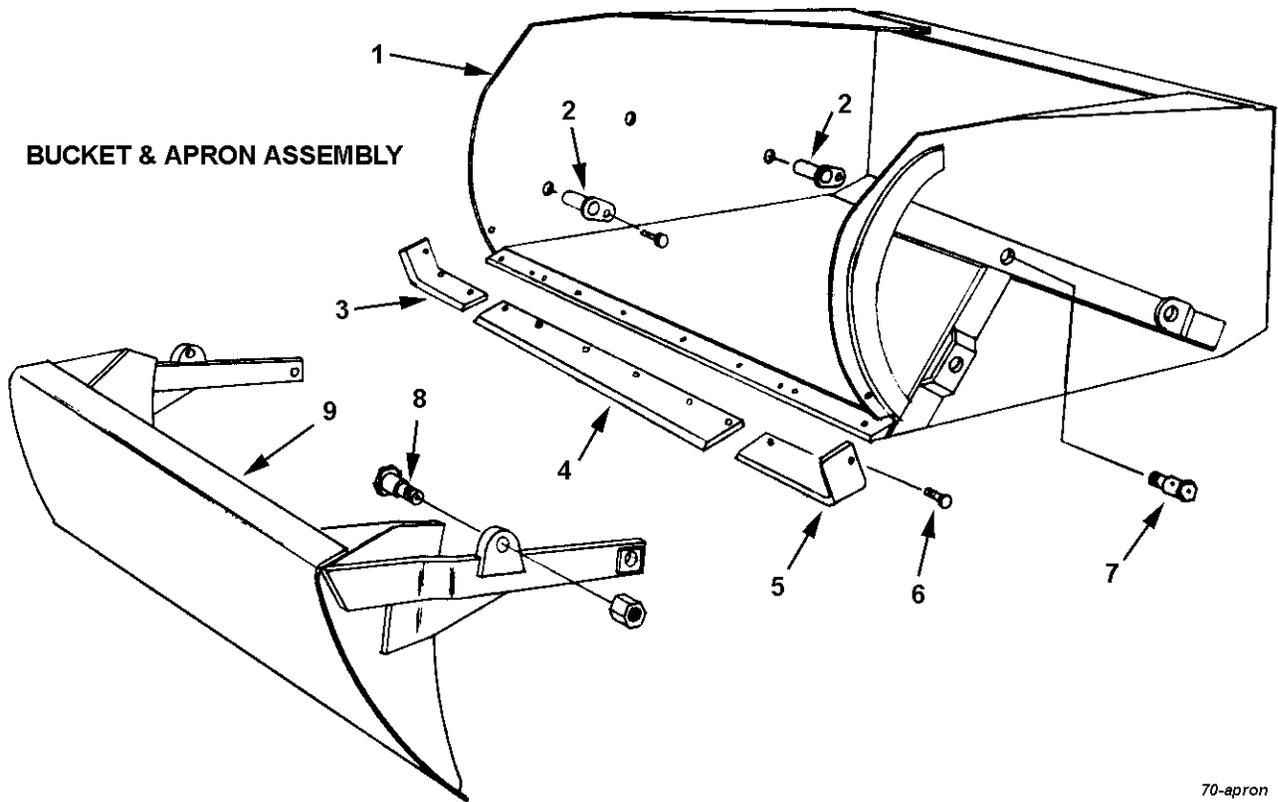


70-apron

<u>KEY NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	A7008	Bucket
2	A8005	Pin, 1-1/2" x 2-3/4" w/ locking head Bolt, 5/8" x 1-1/2" NF w/ nut & lockwasher
3	A2225	Right cutting edge
4	A8030	Center cutting edge, 8" x 54"
5	A2222	Left cutting edge
6		Plow bolt, 1/2" x 1-3/4" w/ nut (6 req'd) Plow bolt, 5/8" x 2" w/ nut (6 req'd)
7	A6010	Shoulder pin, 1-5/8" to 1-1/4" w/ zerk in head Nut, 1-1/4" NF, lock type
8	A6019	Shoulder pin, 1-5/8" to 1-1/4" w/ zerk in thread end Nut, 1-1/4" NF, lock type
9	A7009	Apron

WHEEL, HUB & SPINDLE

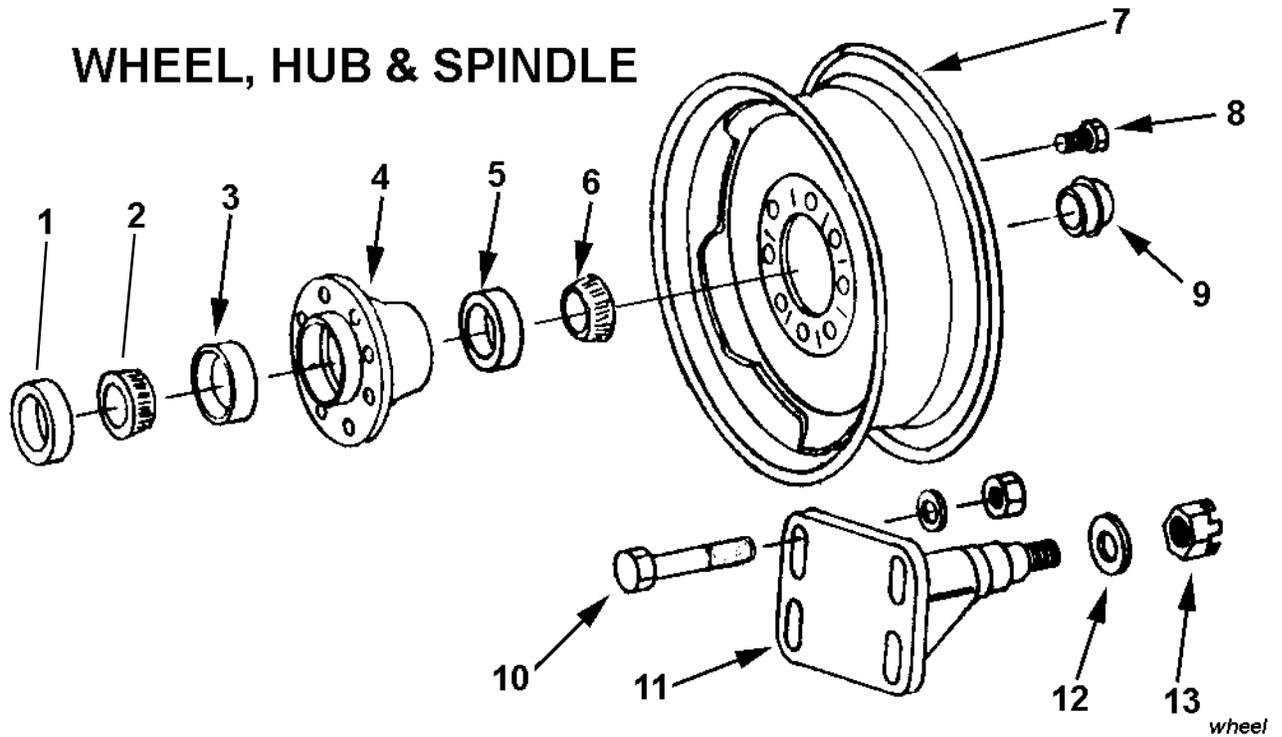

<u>KEY NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	A4512	Grease seal
2	A4513	Bearing cone (inner)
3	A4514	Bearing cup (inner)
4	A4515	Hub (less bearings)
5	A2233	Bearing cup (outer)
6	A4516	Bearing cone (outer)
7	A4521A	Wheel, 20" DC
	A6022	Wheel, 16" x 11" DC (optional)
8	A4519	Wheel bolt, 9/16" NF
9	A2235	Hub cap
10		Bolt, 3/4" x 6" w/ flat washer & nut
11	A4520	Spindle weldment
12	A2239	Washer, special, 7/8" flat
13		Nut, 7/8" NF castellated

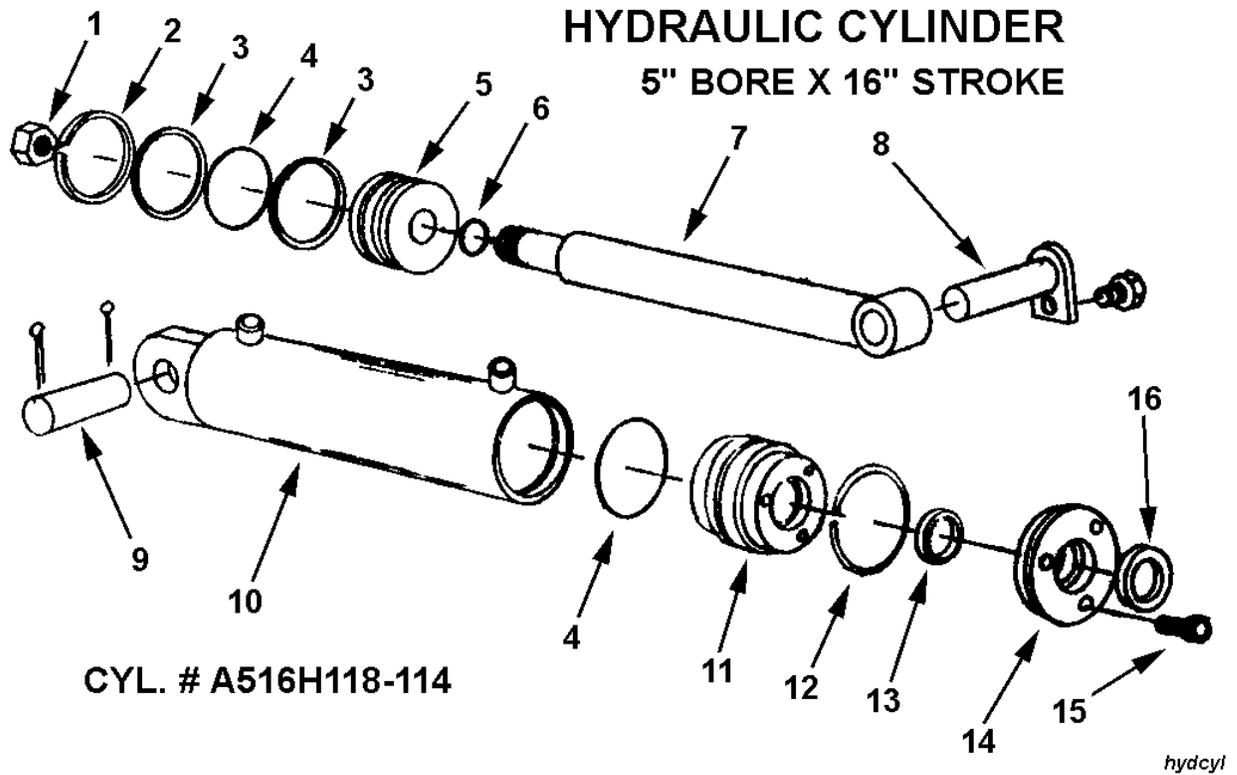

<u>KEY NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	A400H17	Piston nut, 1-1/4" NF
2	A400H04	Cast iron ring, 5" OD
3	A400H05	Backup washer, 5" OD
4	A400H06	O-ring, 5" Odx 1/4"
5	A400H07	Piston, 5" dia.
6	A22H27	Piston gasket, 1-1/4" ID
7	A70H10	Shaft, 2" dia.
8	A7010	Pin, 1-1/4" x 6"
9	A45003	Capscrew, 1/2" x 1" NC w/ lockwasher
10	A400H09	Pin, 1-1/8" x 3-1/4"
		Cotter pin, 3/16" x 1-1/2"
10	A400H09	Barrel Assembly
11	A400H10	Head gland
12	A400H11	Retainer ring
13	A400H12	O-ring, 2"
	A400H12A	Backup washer
14	A400H13	Head cap
15	A22H18	Capscrew, 1/4" NC x 1"
16	A400H14	Wiper seal
	A400H15B	Packing kit containing:
		1 - A400H04 1 - A400H11 2 - A400H05
		1 - A400H14 2 - A400H06 2 - A400H12
		1 - A22H27 1 - A400H12A

HOW TO OPERATE THE W7B-20DC RIM

Note: This rim has been developed for 20" used truck tires up to and including 9.00-20 ten ply. However, many users have found it possible to mount 10.00-20 twelve ply tires. The following procedures should be followed:

Tools and Materials Required:

One Set Firestone Truck Tire Tools (48-A-200)
 One Pair Vise-Grip Pliers
 Lubricant (Avoid use of compound that contains water . . . or a solvent injurious to rubber — see your rim distributor)

MOUNTING:



1. Remove flap inasmuch as it is not required on the drop center rim mounting and it prevents mounting the tire. Check to see tube is in casing and inflated sufficiently to prevent sag below tire beads.



2. Place rim on floor with valve hole side up. Place tire over rim with valve stem pointing upwards. Force lower bead into well of rim as far as possible.



3. Lubricate last section of lower bead to facilitate mounting.



4. Using straight end of tool (with stop resting on rim flange) take small bites to work remaining section of lower bead onto rim.



5. Stand tire up with valve and valve hole at top of rim. Insert valve into valve hole.



6. To get top bead in place stand on tire and force bead down as far as possible and clamp vice grip pliers on the flange. (snub side toward tire). Using spoon end of tire iron with lug side towards rim, work progressively around bead using small bites until bead slips over flange onto rim base. In order to mount last 6" of bead it usually is necessary to insert second tire iron and lubricate the last bead portion.

DEMOUNTING:



1. Remove valve core to deflate and loosen tire from bead seat of rim on both sides. Lubricate upper bead of tire thoroughly. With stops toward rim, insert spoon ends of both tools about 10 inches apart. While standing on tire to hold bead in well, pull one tool back toward center of rim.



2. Hold first tool in position with one foot and pull second tool toward center of rim. Progressively work top bead off rim, taking additional bites if necessary.



3. Stand tire and tube in vertical position with valve at top of assembly and remove valve from valve hole. Then place valve at bottom of assembly and pull out upper portion of tube so it will not interfere with demounting the second bead. Lubricate second bead. At top of assembly insert straight end of tool between bead and back flange of rim at about a 45° angle. Turn tool so it is perpendicular to rim. Pry second bead off.

ELECTRIC WHEEL COMPANY-QUINCY, ILL.

Division of the Firestone Tire & Rubber Company